


SPECIFICATIONS - FZ4028T




Configuration	4x2
GVW	16,000kg
GCM	40,000kg
Axle GVW ratings	Front: 6,600kg Rear: 11,000kg
Kerb weight (10L fuel)	Front: 4,220kg Rear: 2,565kg Total: 6,785kg est
Wheelbase	3,600mm
Engine	OM906, 6.4L, 6 cylinder, Euro 5

Power/torque	285hp@2200rpm / 1120Nm@ 1200 to 1600rpm
Transmission	9 spd G131 Synchronesh Ratios: 14.57- 9.48 - 6.64 - 4.82 - 3.67 - 2.59 -1.81 - 1.32 - 1.00 : R - 13.86
Axles	Front: Reverse Elliot (6,600kg) Drive Axle : Full Floating with Diff Lock
Axle ratio	4.300 : 1
Suspension	Front: Parabolic with Shock Absorbers and Anti Roll Bar Rear: Semi elliptic springs with shock absorbers
Brakes	Full Air S cam with Spring Park Brakes & ABS Exhaust Brake & Engine brake
Tyres	295/80R22.5
Wheels	8.25 x 22.5 10 Stud ISO (no spare)
Fuel	290L + 60L AdBlue
Electrical	24 Volt / 80 Amp Alt
Performance	90km/hr speed limited Max gradability = 23%
Cab	Air Suspended Drivers Seat with Integral Seat Belt Power Windows & Central Locking Tilt & Telescopic Steering Wheel Tachometer with Engine Over Run Warning Roof Vent Air Conditioning Radio with CD, USB & Aux input Reverse Warning Buzzer

OM906

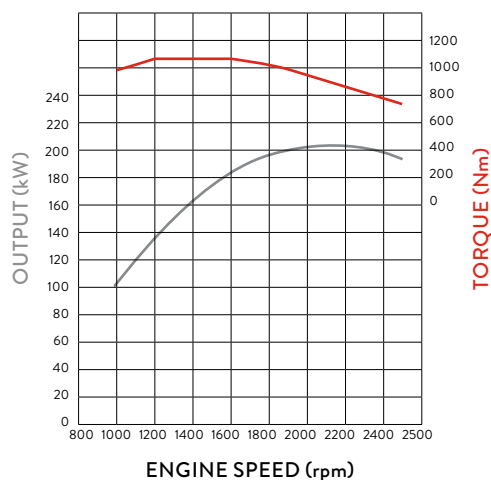

SPECIFICATIONS - FZ4028T

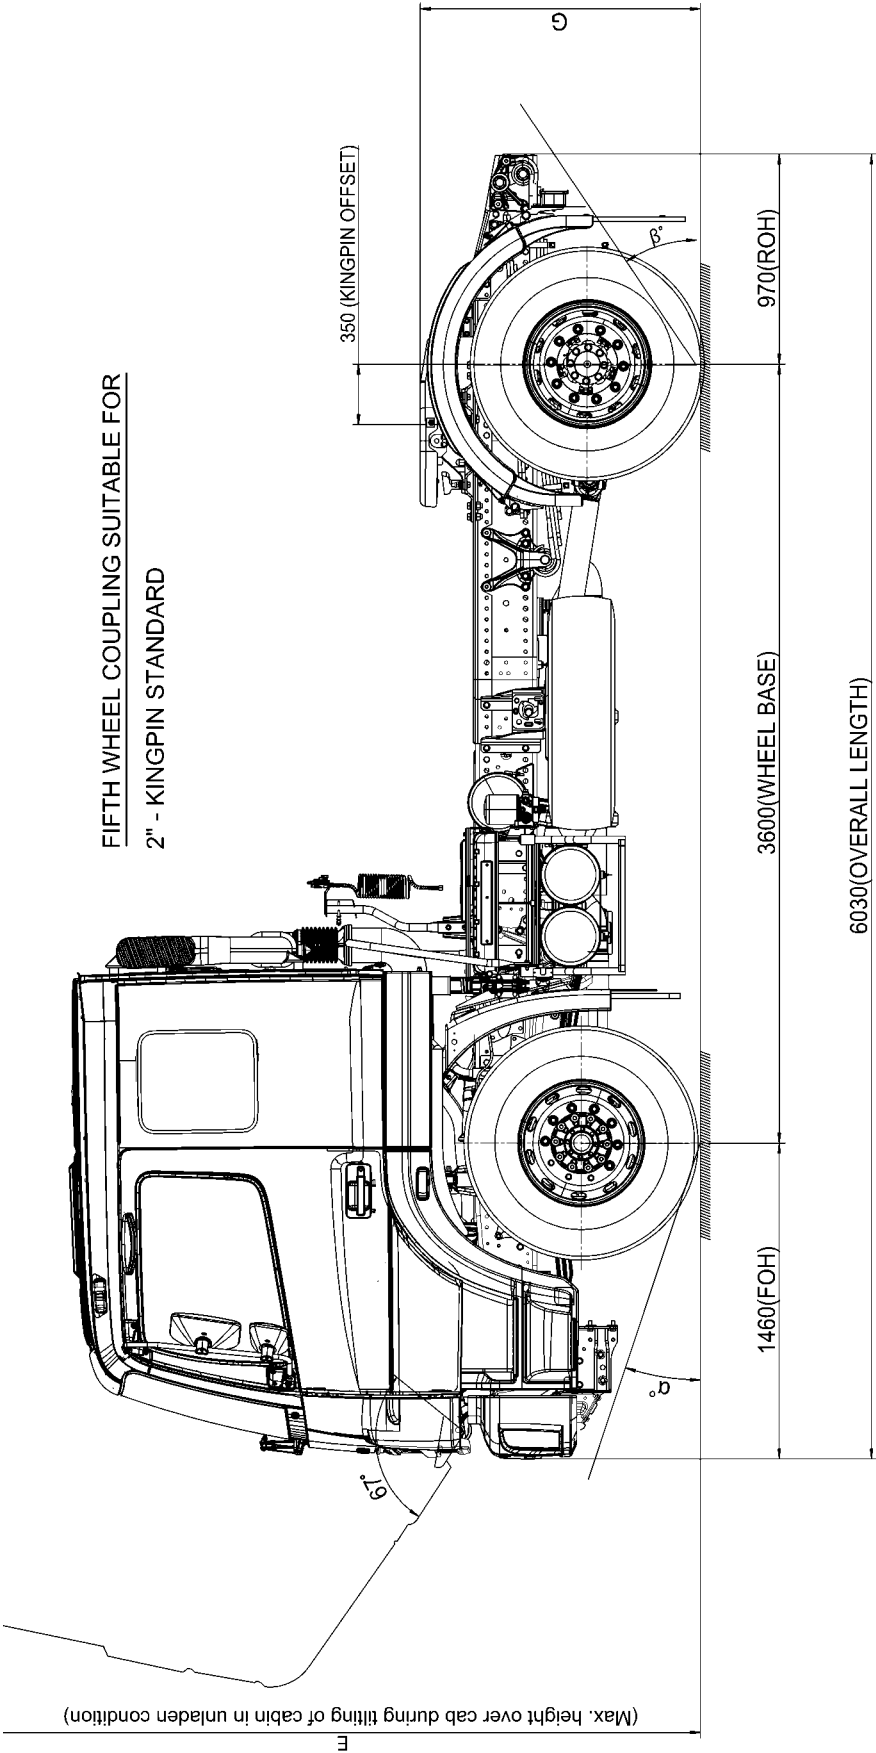

FZ4028T

Wheelbase	3,600
Overall Length	6,030
Width	2,500
Height	2,900
Rear Over Hang (ROH)	970
Front Track	2,045
Rear Track	1,805

Note: All dimensions are in mm