





Model code	FJX4WL2RFBA	Axles	Front: Reverse Elliot (6,600kg) Rear: Full Floating with Diff Lock (10,000kg) Ratio : 4.300 : 1
Configuration	4x2	Suspension	Front: Parabolic with Anti Roll Bar Rear: Semi Elliptic Springs
GVM	16,000kg	Brakes	Full Air S Cam with Auto Brake Adjustment & ABS Park Brake: Rear Wheel Spring Actuated Auxiliary: Exhaust Brake and Engine Brake
GCM	32,500kg	Tyres	295/80R22.5
Axle GVM ratings	Front: 6,600kg Rear: 10,000kg	Wheels	8.25 x 22.5 10 Stud ISO
Kerb weight (10L fuel)	Front: 3,860kg Rear: 2,330 kg Total: 6,190kg	Fuel	260L + 60L Ad Blue
Engine	OM906, 6.4L, 6 cylinder	Electrical	24Volt / 80Amp Alt
Power/torque	285hp (210kW) @2200rpm / 1120Nm@ 1200-1600rpm	Performance	104km/hr speed limited; Max gradability = 60%
Transmission	9spd G131 manual synchromesh Ratios: 14.57- 9.48 - 6.64 - 4.82 - 3.67 - 2.59 -1.81- 1.32 -1.00 : R - 13.86	3 Seat Cab	Meets ECE R29 crash standard (max 6,000kg front axle loading) All Steel Forward Control Tilting Day Cab Arctic White (AW1) Air Suspended Driver's Seat with Integral Seat Belt ELR 3 Point with Centre Lap Belt & Driver's Seat Belt Reminder Air Conditioner / Heater / Demister 12V Accessory Power Outlet Radio AM/FM + USB + AUX Central Locking / Electric Windows Dual Door Mirrors + LH Front and Side Safety Mirrors Speedo, Tacho, Air & Fuel Gauges Ad Blue level, Engine Hours, Fuel Consumption, Water Temperature Variable RPM Control Cruise Control

OM906

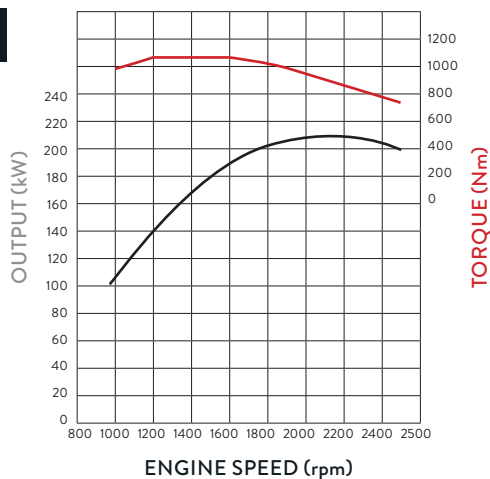

ENDURO FJ1628

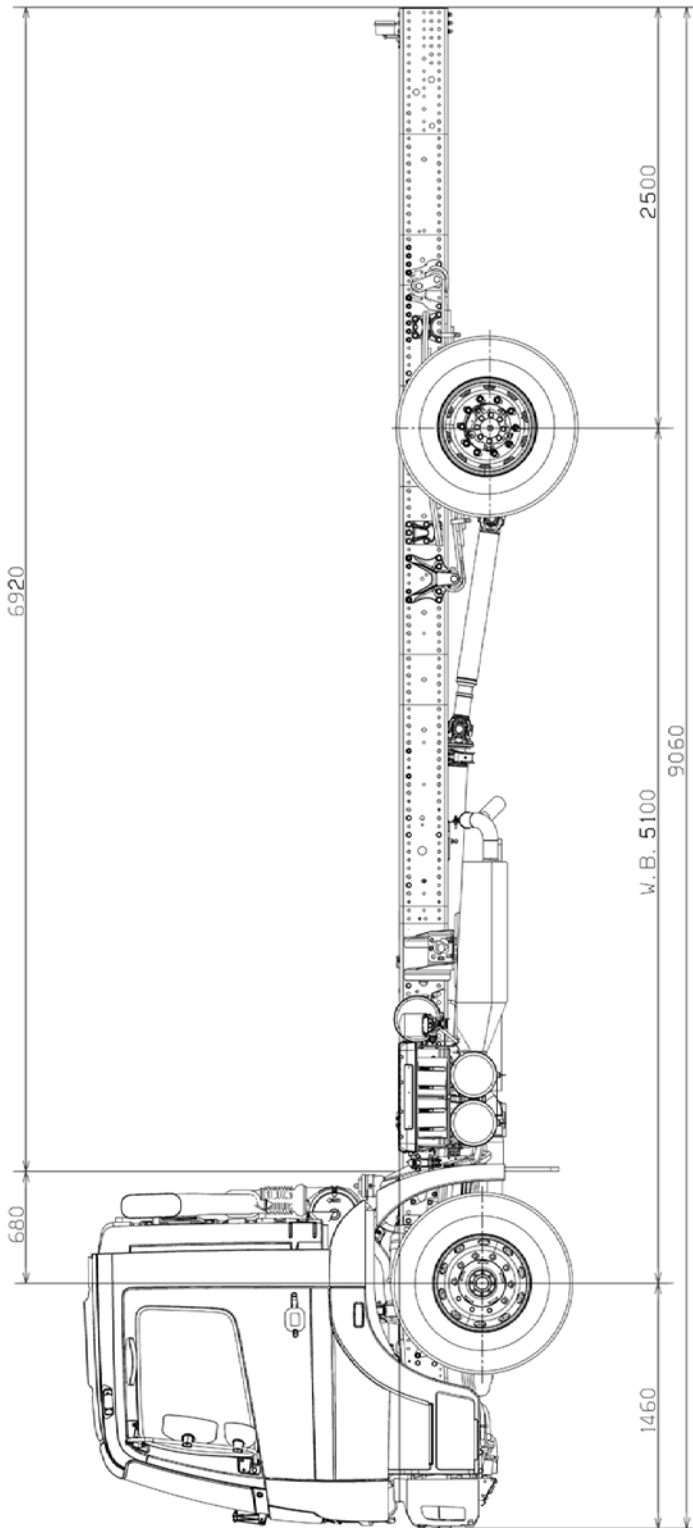

DIMENSIONS

Wheelbase 5,100

Overall Length 9,060

Width 2,490

Height 2,900

Frame Height
At Rear Axle 1,062

Rear Over Hang (ROH) 4,132

Front Track 2,045

Rear Track 1,805

Note: All dimensions are in mm