




Model code	FOX2WN2RFBA	Transmission	9spd G131 manual synchromesh Ratios: 14.57 - 9.48 - 6.64 - 4.82 - 3.67 - 2.59 - 1.81 - 1.32 - 1.00 : R - 13.86	
Configuration	8x4	PTO (Std)	Output Torque: 700Nm Ratio: 1.357 @ 1700rpm	
GVM	31,000kg	Axles	Front: Reverse Elliot (6,600kg x2) Ratio : 4.300 : 1 Rear: Full Floating with Diff Lock & Cross Locks (11,000kg x2) Ratio : 4.778 : 1	
GCM	36,000kg	Suspension	Front: Load Sharing Parabolic with Anti Roll Bar Rear: Multi leaf, Tandem Bogie with Torque Rods & Anti Roll Bar	
Axle GVM ratings	Front: 6,600kg x2 Rear: 11,000kg x2	Brakes	Full Air S Cam with Auto Brake Adjustment & ABS Auxiliary: Exhaust Brake and Engine Brake	
Kerb weight (10L fuel)	Front: 5,180kg Rear: 3,870kg Total: 9,050kg	Tyres	295/80R22.5	
Engine	OM906, 6.4L, 6 cylinder	Wheels	8.25 x 22.5 10 Stud ISO	
Power/torque	285hp (210kW) @2200rpm / 1120Nm@ 1200-1600rpm	Fuel	260L + 60L Ad Blue	
Live Drive PTO	Output Torque: 600Nm Ratio 1:07 x engine speed	Electrical	24Volt / 80Amp Alt	
OM906			Performance	90km/hr speed limited; Max gradability = 51%
		3 Seat Cab	Meets ECE R29 crash standard (max 6,000kg front axle loading) All Steel Forward Control Tilting Day Cab Arctic White (AW1) Air Suspended Driver's Seat with Integral Seat Belt ELR 3 Point with Centre Lap Belt & Driver's Seat Belt Reminder Air Conditioner / Heater / Demister 12V Accessory Power Outlet Radio AM/FM + USB + AUX Central Locking / Electric Windows Dual door mirrors + LH Front and Side Safety Mirrors Speedo, Tacho, Air & Fuel Gauges Ad Blue level, Engine Hours, Fuel Consumption, Water Temperature Variable RPM Control	

ENDURO FO3128

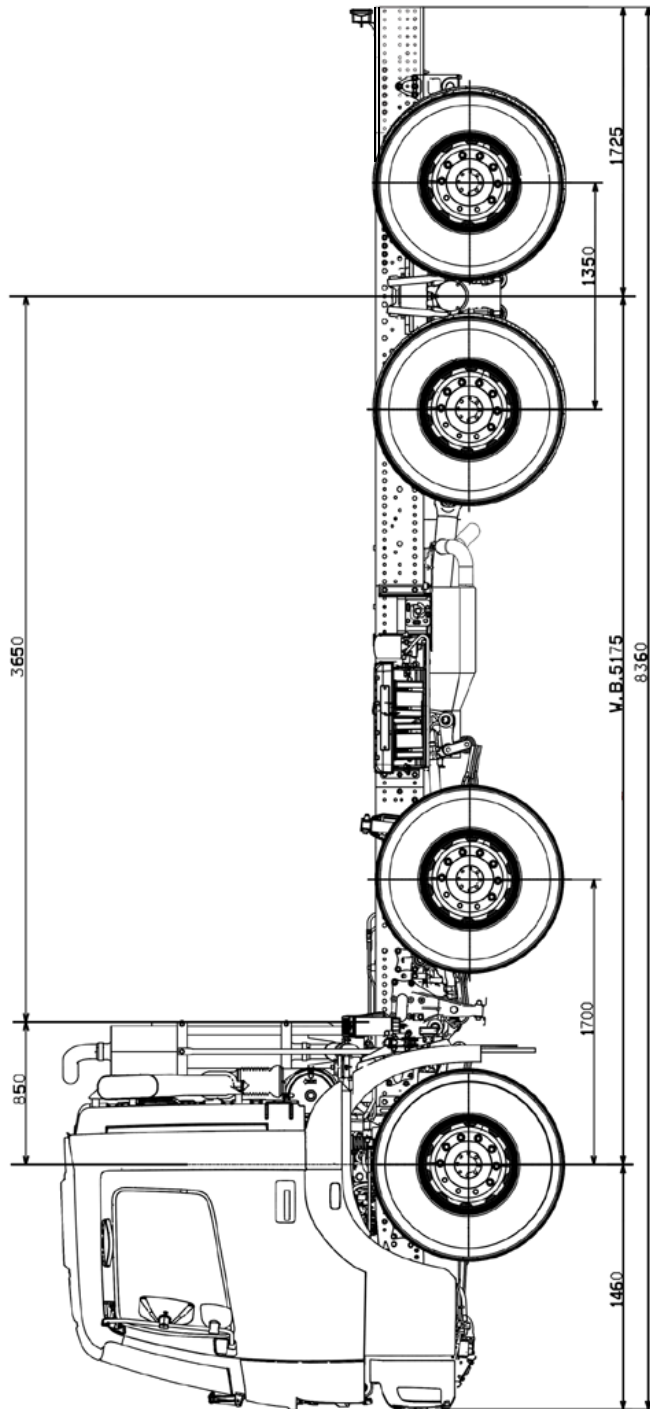

DIMENSIONS

Wheelbase 5,175

Overall Length 8,360

Width 2,490

Height 2,945

Frame Height
At Rear Axle 1,130

Rear Over Hang (ROH) 1,725

Front Track 2,045

Rear Track 1,805

Note: All dimensions are in mm