


SPECIFICATIONS - FI1217




GVM	12,000kg
GCM	15,500kg
Axle GVW ratings	Front: 4,500kg Rear: 9,144kg
Kerb weight (10L fuel)	Front: 2,320kg Rear: 1,520kg Total: 3,840kg
Wheelbase	4,800mm
Engine	4D37, 3.9L 4 Cylinder Euro 5
Power/torque	170hp @ 2500rpm / 520Nm @ 1500rpm

4D37

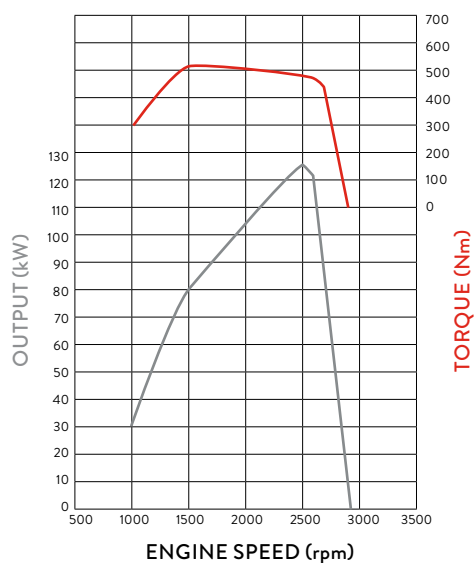

Transmission	6 spd G85 manual Ratios (1st - 6th): 6.696 - 3.806 - 2.289 - 1.480 - 1.000 - 0.728 - Rev: 6.294
Axles	Front: Reverse Elliot (3,600kg) Rear: Full Floating (7,400kg) Ratio : 5.130 : 1
Suspension	Multi Leaf Front and Rear with Anti Roll Bars
Brakes	Full air S cam with spring park brakes & ABS Exhaust Brake
Tyres	255/70R22.5
Wheels	7.5 x 22.5 8 Stud ISO
Fuel	200L + 27L Ad Blue
Electrical	24 Volt / 45 Amp Alt
Performance	100km/hr speed limited Max gradability = 32%
Cab	3 Seats Power Windows and Central Locking Tilt and Telescopic Steering Wheel Air Conditioning Radio with CD, USB and Aux Input Reverse Warning Buzzer

SPECIFICATIONS - FI1217

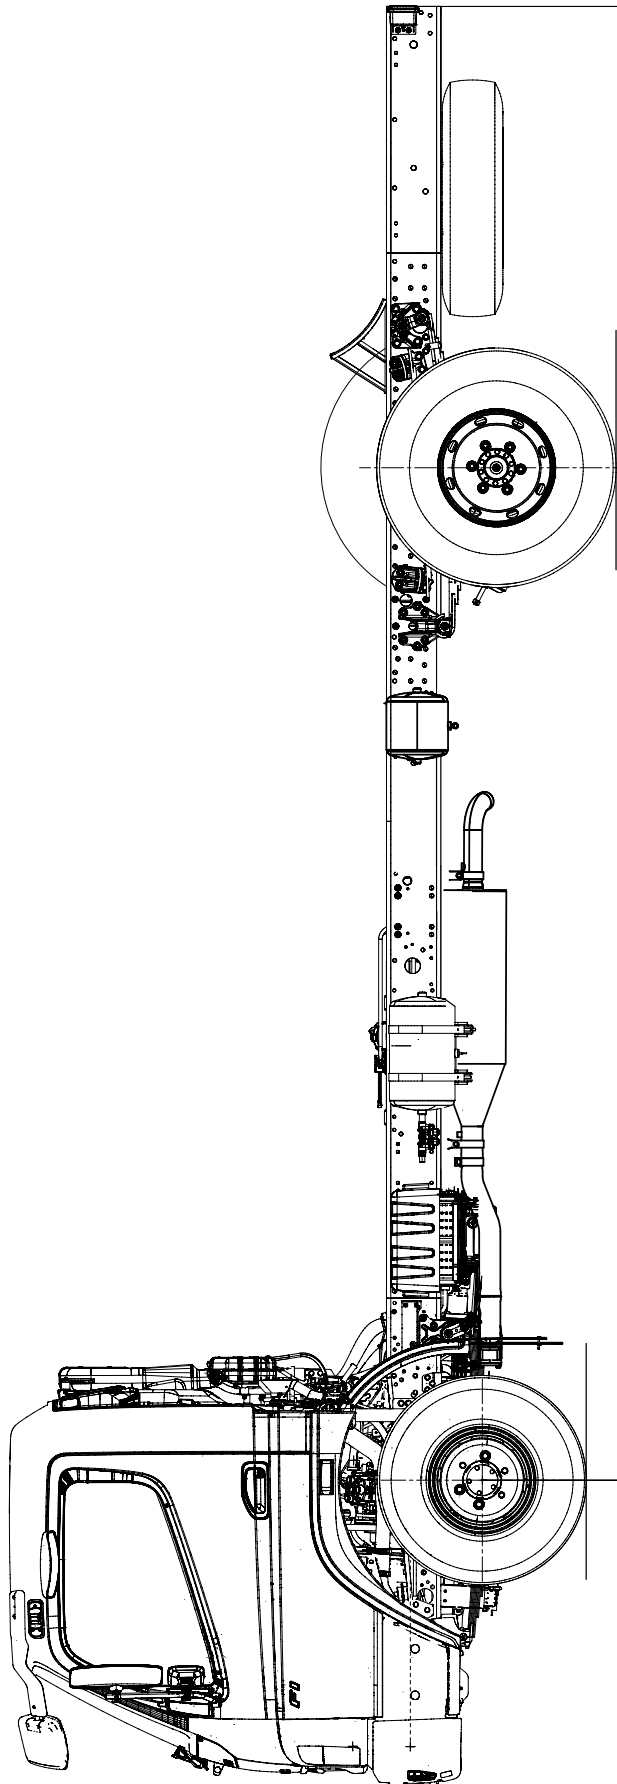

FI1217

Wheelbase	4,800
Overall Length	8,475
Width	2,230
Height	2,470
Rear Over Hang (ROH)	2,400
Front Track	1,790
Rear Track	1,695

Note: All dimensions are in mm