





Model code	FJYWT2RFBA
Configuration	6x2
GVM	25,000kg
GCM	36,000kg
Axle GVM ratings	Front: 6,600kg Rear: 19,000kg
Kerb weight (10L fuel)	Front: 3,940kg Rear: 3,420kg Total: 7,360kg
Engine	OM906, 6.4L, 6 Cylinder
Power/torque	285hp (210kW) @ 2200rpm / 1120Nm @ 1200-1600rpm

Transmission	9 spd G131 Manual Synchromesh Ratios: 14.57 - 9.48 - 6.64 - 4.82 - 3.67 - 2.59 - 1.81 - 1.32 - 1.00 : R - 13.86
PTO (Std)	Output Torque: 700Nm Ratio: 1.357 @ 1700rpm
Axles	Front: Reverse Elliot (6,600kg) Drive Axle: Full Floating with Diff Lock; Ratio: 4.3:1 Tag Axle: Model IT-10 (Combined rating 19,000kg)
Suspension	Front: Parabolic with Anti Roll Bar Rear: Semi Elliptic Springs with Offset Load Share (53.7 / 46.3) and Antiroll Bar
Brakes	Full Air S Cam with Auto Brake Adjustment and ABS Auxiliary: Exhaust Brake and Engine Brake
Tyres	295/80R22.5
Wheels	8.25" x 22.5" 10 Stud ISO
Fuel	380L + 60L Ad Blue
Electrical	24Volt / 80Amp Alt
Performance	104km/hr speed limited; Max gradability = 35%
3 Seat Cab	Meets ECE R29 crash standard (max 6,000kg front axle loading) All Steel Forward Control Tilting Full Cab Arctic White (AW1) Air Suspended Driver's Seat with Integral Seat Belt ELR 3 Point with Centre Lap Belt & Driver Reminder Air Conditioner / Heater / Demister 12V Accessory Power Outlet Radio AM/FM + USB + AUX Central Locking / Electric Windows Dual Door Mirrors + LH Front and Side Safety Mirrors Speedo, Tacho, Air and Fuel Gauges, Ad Blue Level, Engine Hours, Fuel Consumption, Water Temperature Variable RPM Control, Cruise Control

OM906

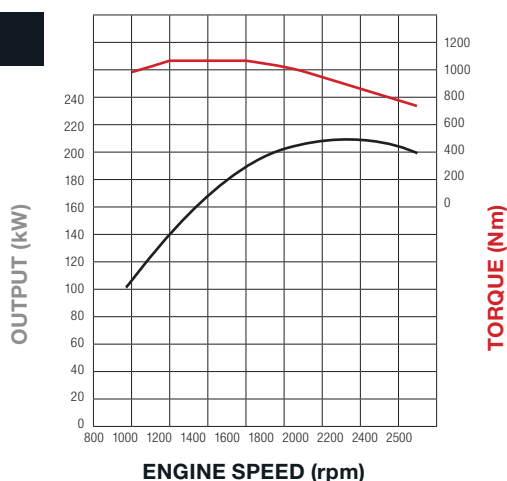

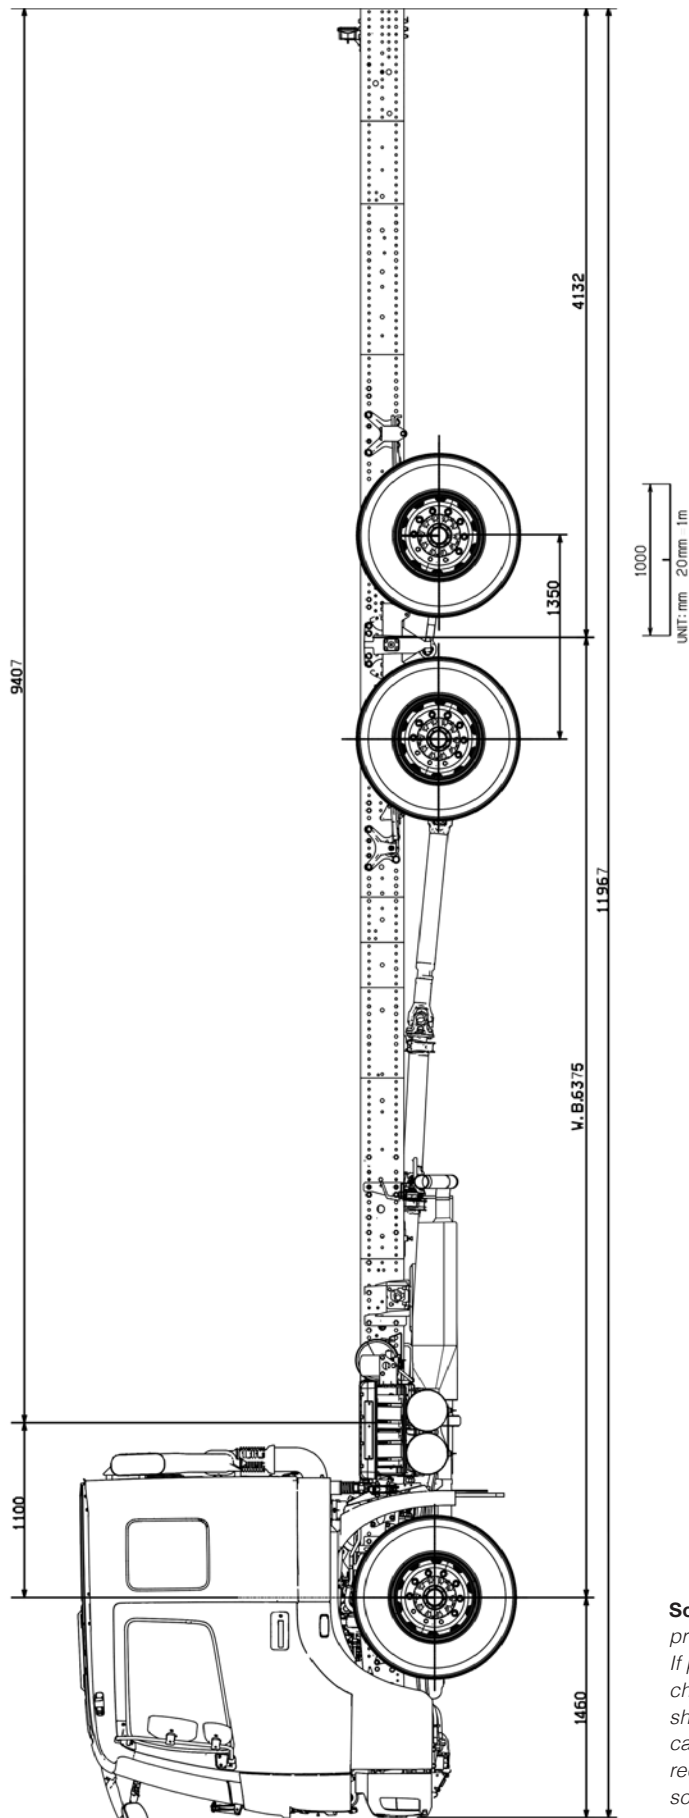

DIMENSIONS

Wheelbase	6,375
Overall Length	11,967
Width	2,490
Height	2,905
Frame Height At Rear Axle	1,075
Rear Over Hang (ROH)	4,132
Front Track	2,045
Rear Track	1,805

CURTAINSIDER BODY

Length	8,620 (8,200 between pillars)
Width	2,490
Height	2,900
Subframe	KMB Duragalv fully welded steel
Floor	21mm Trans-Tex
Side walls	Structurflex
Tail lift	2.5m alloy platform with 2T max load
Tie rails	25mm steel pipe
Toolbox	800W x 500H x 500D black powder coated
Tie Rails	25mm steel pipe
Toolbox	800W x 500H x 500D black powder coated

Note: All dimensions are in mm

Scale = 1:50 (20mm = 1 metre). *This scale is accurate when printed at full size (as available from your local FUSO dealer). If printing a downloaded pdf from the Fuso NZ website, please check your printer settings. Please be aware that printing these sheets at anything other than 100% size can alter the scale and cause incorrect measurements. Fuso NZ and its authorised dealers recommend customers seek professional advice from independent sources before commencing any engineering activities.*

A policy of continual improvement means that specifications detailed on this sheet are subject to change without notice. Contact your authorised FUSO dealer to confirm current specifications. FUSO is a registered trademark of Mitsubishi Fuso Truck & Bus Corporation. Copyright © Fuso NZ Ltd (2022).