# **CANTER EURO 3.5T**

GVM	GCM	POWER	W/BASE	CODE
6500kg	10000kg	157ps	2800mm	FEC81CR3SFAC
5995kg	9500kg	157ps	2800mm	FEC81CR3SFAC




# PERFORMANCE

Maximum Speed:	126 Kmh
Gradeability at Rated GVM:	34% at 6500kg
Gradeability at Rated GCM:	N/A
TurningCircle(kerbtokerb):	10.4m

# ENGINE

Mitsubishi 4P10-7AT4 (Euro 5)			
Description:	4 Cylinder		
Configuration:	Inline-DOHC 4 Valve		
Type:	Variable Geometry Turbo Charged		
	with Air to Air Intercooler		
Displacement:	2998cc		
Bore x Stroke:	95.8 x 104mm		
Power (DIN nett): 110kw @ 2840 to 3500rpm			
Torque (DIN nett): 370Nm @ 1350 to 2840rpm			
Compression Ratio: 17.5:1			
Oil Cooler:	Water Cooled		



# FUEL

Pump:	Bosch Common Rail
Governor:	Electronic
Filtration:	Main Filter with Water Separator
FuelCapacit	y: 100 Litre/Lockable
Air Cleaner:	Dry Paper Element/Vertical Intake

# **EMISSION SYSTEMS**

Emission Standard:

EuroV+Enhanced Environmentally Friendly Vehicle (EEV)

Diesel Particulate Filter (DPF) Exhaust DPF Status on Dash Display

# COOLING

460mm Diameter with 9 Blades Viscous Coupling Radiator: Corrogated Fin with Expansion Tank

Voltage: 12 Volt Alternator Capacity: 110 Amp Battery Capacity: 1x12V90AH Headlamp: Halogen 55/60W Foglamp: Front Bumper

### **CLUTCH**

Description: Hydraullic Control-Single Dry Plate

# TRANSMISSION

Model M038S5 Description:		Manually Operated All
		Synchromesh Gears
No.of Speeds:		5 Forward - 1 Reverse
Ratios:	– 1st:	5.494
	– 2nd:	3.193
	– 3rd:	1.689
	-4th:	1.000
	– 5th:	0.723
	– Rev:	5.494
PTO Opening:		LHside

# **PROPELLER SHAFT**

Type:	P3
Universal Joint:	Needle Roller

Type:	Mitsubishi Reverse	Elliot "I" Beam
Design Capac	ity:	3100kg
Maximum Operating Capacity:		3100kg

# REAR AXLE

Description:	Mitsubishi D035H
Туре:	Full Floating Hypoid
	with Limited Slip Diff
Design Capacity:	6000kg
Maximum Operating Capaci	ty: 6000kg
Ratio:	5.285

# STEERING

Type: Integral Power Assisted Ball Steering Wheel: Urethane with Air Bag Steering Column: Tilt/Telescopic Adjustment with Steering Lock

BRAKES		
Type:	Hydraulic Dual Circuit with ABS/EBD	
	Dual Caliper Ventilated Disc Front & Rear	
	Brake Override Safety System	
Size:	F 235 x 40mm	
	R 235 x 40mm	
ParkBr	ake: Transmission Mounted	

Auxiliary:

FRONT	SUSPENSION
Type:	Semi-Elliptic Leaf Springs with Shock Absorbers & Stabilizer
Size:	4P10-7AT41150x70x10mmx 3+11mmx2-5leaf
Capacity	at Ground: TBA

Exhaust Brake

REAR SUSPENSION		
Туре:	Semi-Elliptic Leaf Springs with Shock Absorbers & Stabiliser	
Size:	1250x70x10-3leaf 11 - 2	
Auxiliary: Capacity at Ground:	12 - 1 880 x 70 x 15 - 3 leaf TBA	

Reinforced Tapered Channel
212x65x6mm
850mm
540 MPA

WHEELS & TYRES	
Wheel Type:	Single Piece Tubeless Rims
WheelSize:	17.5"
Wheel Stud Pattern:	6 STUD
Tyre Size:	215/75R17.5 Traction
	PatternonRear
Spare & Tyre Carrier:	Yes



Fan: Fan Drive:

ELECTRICAL

	Manually Operated All
	Synchromesh Gears
	5 Forward - 1 Reverse
– 1st:	5.494
– 2nd:	3.193
– 3rd:	1.689
-4th:	1.000
– 5th:	0.723
– Rev:	5.494
	LH side
	- 2nd: - 3rd: - 4th: - 5th:

Гуре:	
Jniversal Joint:	Needle Rol

# FRONT AXLE

Туре:	Mitsubishi Reverse	Elliot "I" Beam
Design Capacit	y:	3100kg
Maximum Operating Capacity:		3100kg

# KERB WEIGHT (kg - estimated)

Front:	1695
Rear:	1355
Total:	3050
Includes coolant, oils and 20 litres fuel.	

### DIMENSIONS (mm)

WheelBase:	2800
OverallLength:	5120
Rear Overhang:	1130
OverallHeight:	2195
OverallWidth:	1995
TrackFront:	1675
TrackRear:	1670

# **CAB FEATURES**

All Steel Forward Control. ECE R29 Safety Cab	
Туре:	Manual Tilt 45 Degrees
Mounting:	Hydroelastic 4 Point
Colour:	White W31
Interior:	FullyTrimmed with Vinyl
Windscreen:	Laminated & Tinted
Windscreen Wipers:	2 Speed-Intermittent with Integrated Washer Nozzles
RearVisionMirrors:	1 Internal
	2x External Convex-Heated
Seating Capacity:	3
Seat Belts: Driver-Height Adjustable: 3 Point ELR with Tension Reducer Passenger-ELR 3 point: 2 Point Centre	
Driver Seat: Susp	ension Base, Fabric Trim with
Built in Headrest, Lumber Support & Armrest	
Passenger Seat: Flat Folding 2 Passenger Bench	

Passenger Seat: Flat Folding 2 Passenger Bench Type with Lefthand Headrest & Fabric Trim

# INSTRUMENTS

### Gauges:

- Speedo with Odometer & Dual Trip Meter
- Tachometer
- Fuel Level

# Warning Lights:

- High Beam
- Turn Signal/Hazard Warning
- Park Brake
- Exhaust Brake
- Engine Pre-Heat
- Alternator
  Low Oil Pressure
- SRS Airbag
- Brake Pad Wear
- Immobilizer
- Seat Belts
- DPF

# **SWITCHES**

- Fog Lamps
- Fluorescent Cab Lamp
- Heated Exterior Mirrors
- DPF Regeneration switch
- Hazard Lights






# CAB EQUIPMENT


- Drivers Air Bag
- Electric Windows with One Touch Drivers
- Keyless Central Locking
- Door Side Impact Beams
- Tinted Side & Rear Glass
- Heater-Demister/Air-Conditioning
- Interior Sunvisors LH/RH
- AM/FM CD Audio with 2 Speakers
- Fluorescent Cabin Lamp
- Interior Dome Lamp with Delay Function
- Front Step lamps
- Cab Front Outline Marker Lights
- Cigar Lighter
- Electric Horn
- Reverse Warning Buzzer
- Tool Kit
- Overhead Parcel Shelves LH/RH
- Lower Dash Document Holder
- Lockable Glovebox


### **MULTI FUNCTION DISPLAY**

- Calendar/Time
- Meter & Gauge Illumination
- Service Reminders
- DPF Level Indication
- Fuel Consumption Indication
- Diagnostic Trouble Code Indication
- Coolant Temperature Gauge
- Odo & Dual Trip Meter

# CANTER EURO TIPPER 3.5T

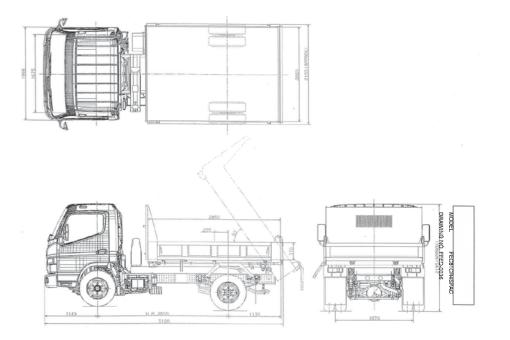

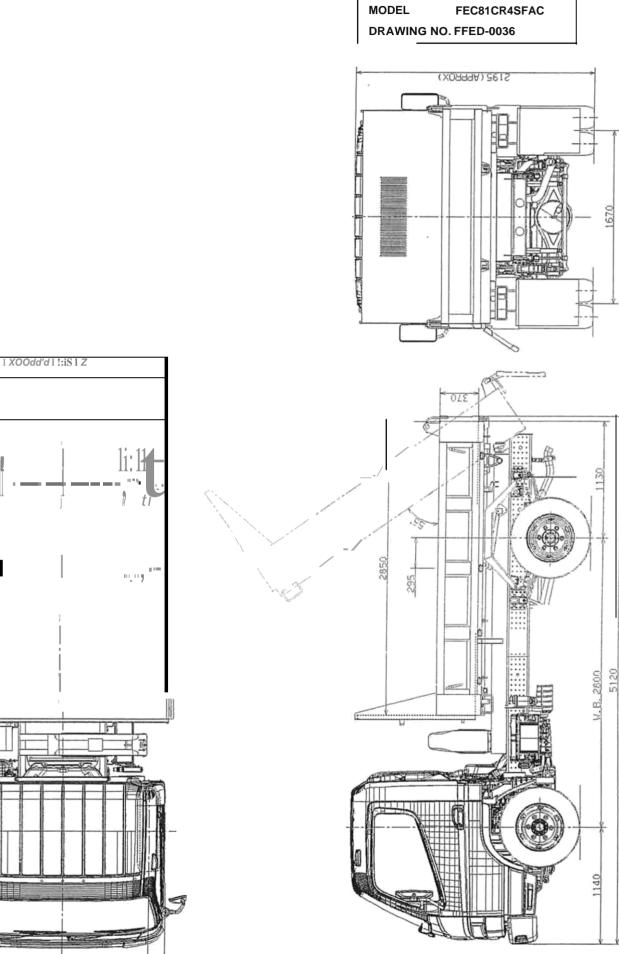

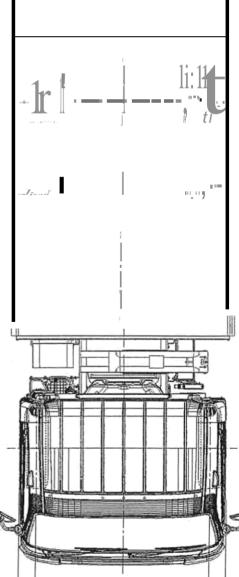

SZ91