

Model code	F0X2WN2RFBA	Transmission	9spd G131 manual synchromesh Ratios: 14.57 - 9.48 - 6.64 - 4.82 - 3.67 - 2.59 - 1.81
Configuration	8x4		1.32 - 1.00 : R - 13.86
GVM	31,000kg	PTO (Std)	Output Torque: 700Nm Ratio: 1.357 @ 1700rpm
GCM	36,000kg	Axles	Front: Reverse Elliot (6,600kg x2) Ratio : 4.300 : 1 Rear: Full Floating with Diff Lock & Cross Locks
Axle GVM ratings	Front: 6,600kg x2 Rear: 11,000kg x2		(11,000kg x 2) Ratio : 4.778 : 1
		Suspension	Front: Load Sharing Parabolic with Anti Roll Bar
Kerb weight (10L fuel)	Front: 5,180kg Rear: 3,870kg		Rear: Multi leaf, Tandem Bogie with Torque Rods & Anti Roll Bar
	Total: 9,050kg	Brakes	Full Air S Cam with Auto Brake Adjustment & ABS Auxiliary: Exhaust Brake and Engine Brake
Engine	OM906, 6.4L, 6 cylinder		Auxilial y. Exilaust Diake and Engline Diake
		Tyres	295/80R22.5
Power/torque	285hp (210kW) @2200rpm / 1120Nm@ 1200-1600rpm	Wheels	8.25 x 22.5 10 Stud ISO
Live Drive PTO	Output Torque: 600Nm Ratio 1:07 x engine speed		
		- Fuel	260L + 60L Ad Blue


OM906



Suspension	Front: Load Sharing Parabolic with Anti Roll Bar Rear: Multi leaf, Tandem Bogie with Torque Rods & Anti Roll Bar	
Brakes	Full Air S Cam with Auto Brake Adjustment & ABS Auxiliary: Exhaust Brake and Engine Brake	
Tyres	295/80R22.5	
Wheels	8.25 x 22.5 10 Stud ISO	
Fuel	260L + 60L Ad Blue	
Electrical	24Volt / 80Amp Alt	
Performance	90km/hr speed limited; Max gradability = 51%	
3 Seat Cab	Meets ECE R29 crash standard (max 6,000kg front axle loading) All Steel Forward Control Tilting Day Cab Arctic White (AW1) Air Suspended Driver's Seat with Integral Seat Belt ELR 3 Point with Centre Lap Belt & Driver's Seat Belt Reminder Air Conditioner / Heater / Demister 12V Accessory Power Outlet Radio AM/FM + USB + AUX Central Locking / Electric Windows Dual door mirrors + LH Front and Side Safety Mirrors Speedo, Tacho, Air & Fuel Gauges Ad Blue level, Engine Hours, Fuel Consumption, Water Temperature Variable RPM Control	



## ENDLIRD F03128

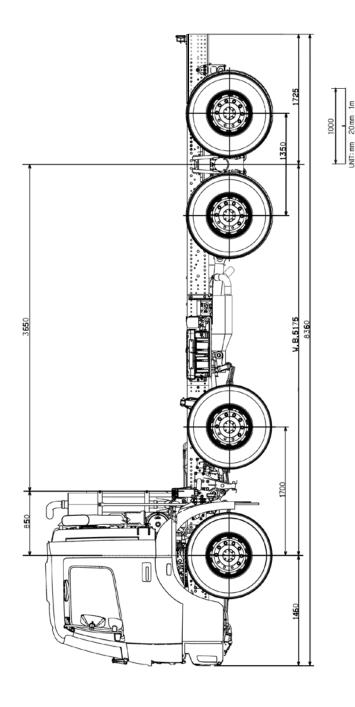

## DIMENSIONS

Wheelbase	5,175
Overall Length	8,360
Width	2,490
Height	2,945
Frame Height At Rear Axle	1,130
Rear Over Hang (ROH)	1,725
Front Track	2,045

Scale = 1:50 (20mm = 1 metre). This scale is accurate when printed at full size (as available from your local FUSO dealer). If printing a downloaded pdf from the Fuso NZ website, please check your printer settings. Please be aware that printing these sheets at anything other than 100% size can alter the scale and cause incorrect measurements. Fuso NZ and its authorised dealers recommend customers seek professional advice from independent sources before commencing any engineering activities.

A policy of continual improvement means that specifications detailed on this sheet are subject to change without notice. Contact your authorised FUSO dealer to confirm current specifications. FUSO is a registered trademark of Mitsubishi Fuso Truck & Bus Corporation. Copyright © Fuso NZ Ltd (2022).

