


ENDURO FJ2528



Model code	FJX3WK2RFBA
Configuration	6x4
GVM	25,000kg
GCM	36,000kg
Axle GVM ratings	Front: 6,600kg Rear: 19,000kg
Kerb weight (10L fuel)	Front: 4,050kg Rear: 3,860kg Total: 7,910kg
Engine	OM906, 6.4L, 6 Cylinder
Power/torque	285hp (210kW) @ 2200rpm / 1120Nm @ 1200-1600rpm
Live Drive PTO	Output Torque: 600Nm Ratio: 1:07 x engine speed

Transmission	9 spd G131 Manual Synchromesh Ratios: 14.57 - 9.48 - 6.64 - 4.82 - 3.67 - 2.59 - 1.81 - 1.32 - 1.00 : R - 13.86
PTO (Std)	Output Torque: 700Nm Ratio: 1.357 @ 1700rpm
Axles	Front: Reverse Elliot (6,600kg) Rear: Full Floating with Diff Lock and Cross Locks (11,000kg x 2); Ratio : 4.778 : 1
Suspension	Front: Parabolic with Anti Roll Bar Rear: Multi Leaf, Tandem Bogie with Torque Rods and Anti Roll Bar
Brakes	Full Air S Cam with Auto Brake Adjustment and ABS Auxiliary: Exhaust Brake and Engine Brake
Tyres	295/80R22.5
Wheels	8.25" x 22.5" 10 Stud ISO
Fuel	290L + 60L Ad Blue
Electrical	24Volt / 80Amp Alt
Performance	90km/hr speed limited; Max gradability = 70%


OM906

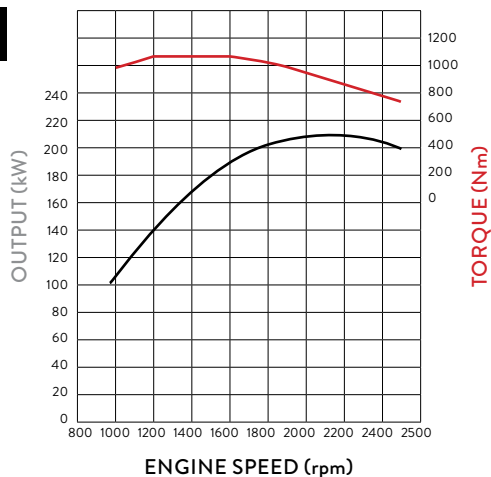

3 Seat Cab

All Steel Forward Control Tilting Day Cab
Arctic White (AW1)
Air Suspended Driver's Seat with Integral Seat Belt
ELR 3 Point with Centre Lap Belt & Driver's Seat Belt Reminder
Air Conditioner / Heater / Demister
12V Accessory Power Outlet
Radio AM/FM + USB + AUX
Central Locking / Electric Windows
Dual Door Mirrors + LH Front and Side Safety Mirrors
Speedo, Tacho, Air and Fuel Gauges
Ad Blue Level, Engine Hours, Fuel Consumption, Water Temperature
Variable RPM Control
Cruise Control

ENDURO FJ2528

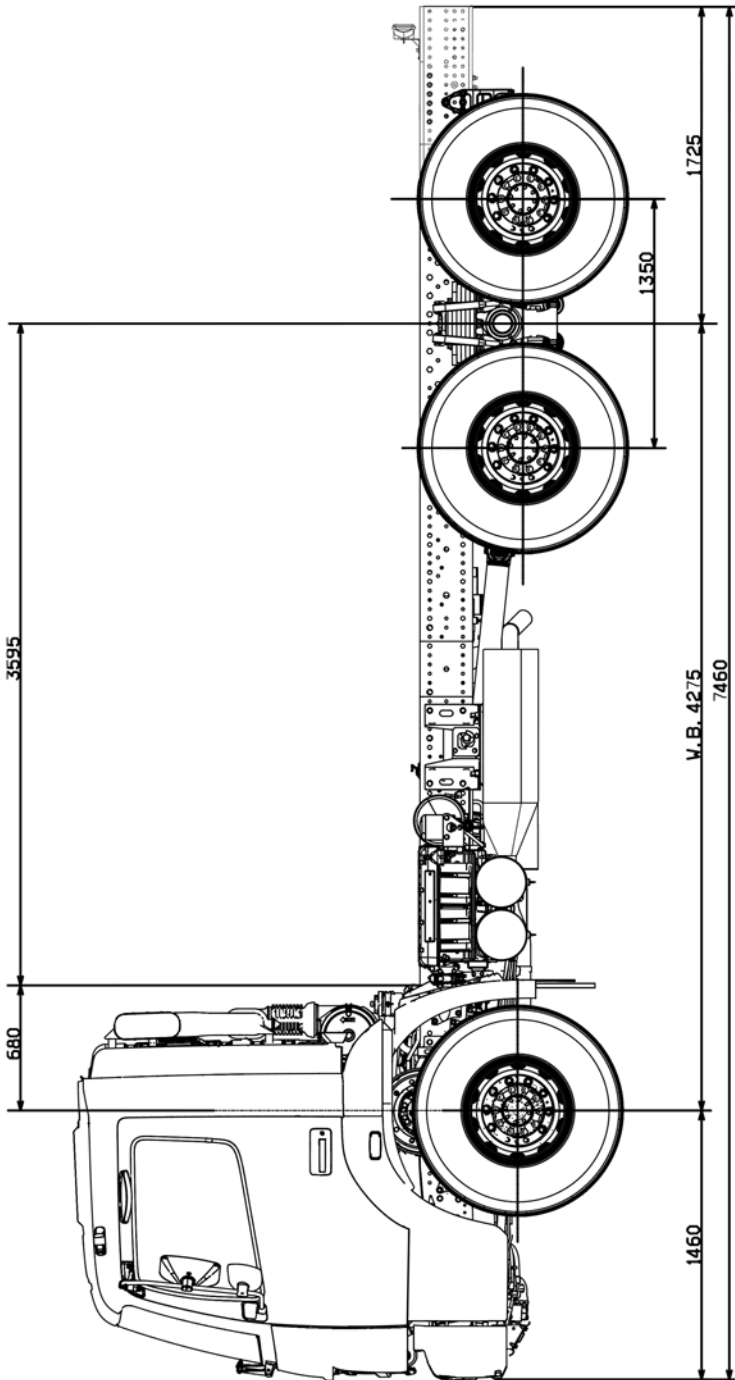

DIMENSIONS

Wheelbase	4,275
Overall Length	7,460
Width	2,490
Height	2,930
Frame Height At Rear Axle	1,110
Rear Over Hang (ROH)	1,725
Front Track	2,045
Rear Track	1,805

Note: All dimensions are in mm